

# Easy box

## INDOOR WALL-MOUNTED DISTRIBUTION BOX


Easy box is designed as a simple distribution box for indoor installation. Is destined especially for FTTH networks. Easy box can be used for storage of pre-connectorized cable or blown cable which can be spliced after request of the customer. It could be used as distribution point in small building facility, or as floor box.

### ■ Benefits

- Easy installation
- Wide portfolio of accessories
- Flat base with mounting holes
- Space for cable reserve before connecting customer
- Possibility to use the box for splicing or patching
- Two positions for adaptor plate
- Capacity up to 6x SC duplex, or 6x LC quad
- Gradiated rubber gland for cable Ø 3-10mm (on each side)
- Breakable outputs on back side (connection through the wall directly to customer)
- Possibility to use loop-through cable
- Splice tray KM4 (max. capacity 24 splices, for fibres G.652d a G.657a,b)
- 4x splice tray KM3 (max. capacity 24 splices and only for fibres G.657 a, b)
- Possibility to place PLC splitter
- Coverage degree IP 20




### ■ Examples of usage

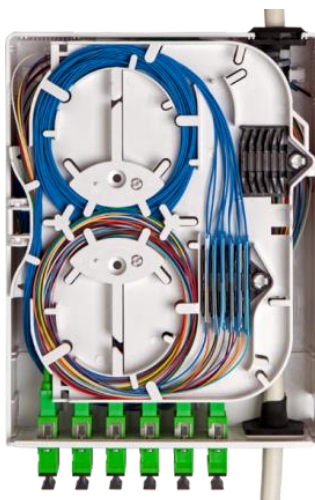


Easy box 24S/12C  
(24 splices; 6x SC duplex)



Patching with covered adaptors  
(24 splices, only fibres G.657 a, b; 6xSC duplex)

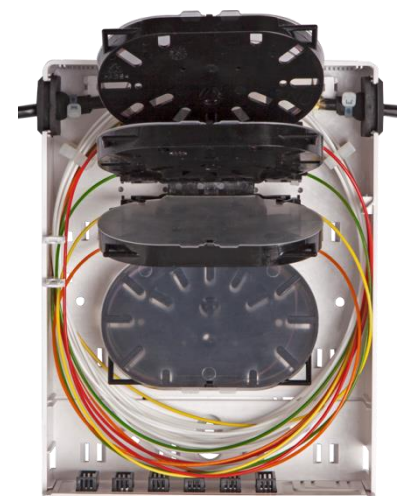

Easy box 48S  
(48 splices, only G.657 a, b)

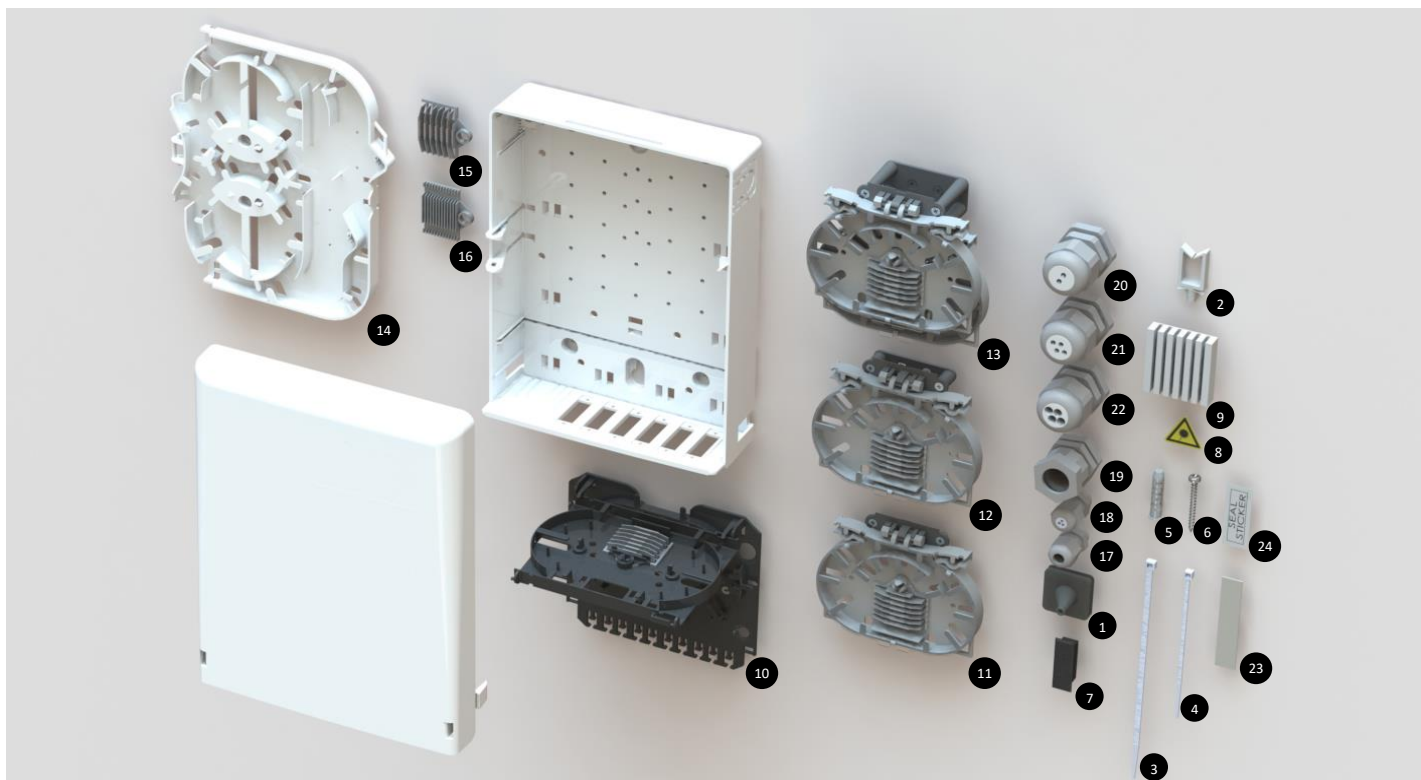

### Optional Accessories

1	85SP.02/1000	Gradiated bushing 3-10mm
2	325800	Cable holder
3	018400	Cable tie PVC 3,6 x 150
4	490594	Cable tie PVC 2,5 x 100
5	490903	Dowel 6mm
6	490904	Screw 4x30
7	CN0061	Plug duplex
8	276900	Laser sticker
9	8541.35/BALOF	Rubber splice holder CTS12
10	85BV.31/0000F	KM2 + management
11	85BV.29/0010F	Splice tray KM3 with hinge
12	85BV.29/001RF	Splice tray KM3 with hinge and reduction
13	85BV.29/002RF	Splice tray KM3 with hinge and reduction
14	85BV.32/0000F	Splice tray KM4 with lid
15	85M9.16/0000	Splice holder TS 12
16	85M9.17/0000	Splice holder K 12
17	85BV.25/000TF	PG 7 Ø 2,5-6,5mm
18	85BV.25/BMVLF	PG 7, 3x Ø 1,6 - 2,6mm
19	301100	PG 16 SEZ 8-16mm
20	8580.67/000MF	PG 16 HI/SEZ insert 2x3mm
21	8580.68/000MF	PG 16 HI/SEZ insert 4x3mm
22	8580.66/000MF	PG 16 HI/SEZ insert 4x5mm
23	492779	Double-sided tape 60x12mm
24	85AX.06/0000	Seal sticker 40x15mm

### Technical specifications

Bushings	Gradiated bushing 3-10mm
Coverage degree	IP20 to ČSN EN 60529
Self-extinguishing degree	V2 to UL 94
Impact protection degree	IK 5 to EN 50102
Material	ABS- Halogen free, flame retardant (V2)
Colour	White, RAL 9003
Dimensions	205 x 157 x 60
Weight	0,350 kg

### Ordering codes

85AX.00/0000F	Easy box – Slack box
85AX.00/0002F	Easy box 24S/12C
85AX.00/0003F	Easy box 48S
For other variants, please, contact our sales department	