




EN The ORMPV hinged module patch panel is designed for placing 48/96 optical connectors indoor. The design of the distributor enables installation on a 19" rack.

- ▶ Capacity of 48/96 optical connectors
- ▶ Connector holder SC simplex, ST, FC, E2000, LC, SC duplex
- ▶ Optical splice tray holder
- ▶ Placement of optical fiber reserve
- ▶ Self-adhesive cable rings
- ▶ Easy assembly
- ▶ Installation into a 19" base
- ▶ Possibility of rear fastening
- ▶ Side depth adjustable 19" mounting kit
- ▶ Height of 1U/2U
- ▶ Cable entrance from the back or the side

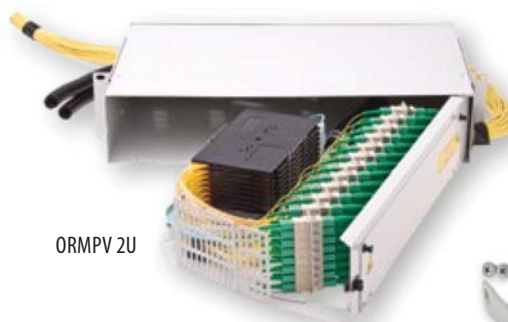

ORMPV 2U

ADJUSTABLE MOUNTING KIT



ORMPV 1U



ORDER CODES

ORMPV 1U

Order Code	Name
8505.80/000CF	Without connectos panel
8505.07/000CF	Panel 24 × E2000
8505.09/000CF	Panel 36 × E2000
8505.12/000CF	Panel 12 × E2000
8505.65/000CF	Panel 12 × SC duplex/QUADPLEX
8563.52/000CF	Panel 24 × SC
8563.53/000CF	Panel 36 × SC
8563.54/000CF	Panel 12 × SC
8505.16/000CF	Panel 24 × SC duplex (1,9 mm)
8505.29/000CF	Panel 24 × ST/FC
8523.40/0000	Splice tray KM1
8510.12/0000	Lid for KM1
491481	Splices holder TS6

KM1 for capacity 24 and splice trays SK 120 for capacity 36
For other variants, please, contact our sales department.

ORDER CODES

ORMPV 2U

Order Code	Name
8563.00/0000F	Without connectos panel
8505.15/000CF	Panel 72 × E2000
8505.27/000CF	Panel 48 × E2000
8505.28/000CF	Panel 48 × ST/FC
8563.51/000CF	Panel 48 × SC
8563.57/000CF	Panel 72 × SC
8505.56/000CF	Panel 96 × SC
8505.57/000CF	Panel 96 × E2000
8505.84/0000F	Set – 8 × Splice tray SK120, splice holders, cover, hinges

KM1 for capacity 72 and splice trays SK 120 for capacity 96
For other variants, please, contact our sales department.

TECHNICAL SPECIFICATIONS

	ORMPV 1U	ORMPV 2U
Colour	Light grey RAL 7035	Light grey RAL 7035
Material – distribution box	Painted steel	Painted steel
Height	1U	2U
Dimensions	436 × 43 × 280 mm	436 × 88 × 282 mm
Weight	4 kg	5.2 kg

RECOMMENDED ACCESSORIES

Splice trays

Splice holders

Lid

Other accessories on the pages 064–072